

STINGER® LED or STINGER DS® LED RECHARGEABLE FLASHLIGHT

MARKET
APPLICATIONS:

Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION:

Compact & extremely powerful, the Stinger® LED and Stinger DS® LED rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in power LED technology. The Stinger DS® LED includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL:

6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

DIMENSIONS:

Stinger® LED Length: 8.41 in. (21.36 cm)

Diameter: Major Diameter: 1.62 in. (4.11 cm)

Stinger DS® LED Length: 8.85 in. (22.48 cm)

Body Diameter: 1.17 in. (2.97 cm)

WEIGHT:

Stinger® LED: 12.4 oz (352 grams)*

Stinger DS® LED: 12.8 oz (364 grams)*

LENS:

Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.


LIGHT SOURCE:

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See Chart. Optimized electronics provide regulated intensity.

Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.


ON/OFF:

Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® LED provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME:


See Chart. All claims to 10% of initial lumen output. Strobe: 7.50 continuous hours.

BATTERY:

3-cell, 3.6 Volt, 2.6Ah NiMH sub-C battery, rechargeable up to 1000 times.

CHARGE HOLDERS:

Fits existing Stinger® chargers and new Smart chargers.

Steady charger: Fully recharges within 16 hours.

Smart charger: Fully recharges within 4.5 hours (5V/1A USB input) or 3 hours (12VDC input).

Smart PiggyBack® charger: Fully recharges within 7.5 hours (5V/1A USB input) or 4 hours (12VDC input).

CHARGE CORDS:

Streamlight universal AC input voltage, 5V/1A USB or 12.7V/.8A output charge cords available with IEC Type A (US & Japan), Type C (Euro), Type G (UK) or Type I (Australia) plugs. 12VDC cigarette lighter or direct wire automotive cords.

FEATURES:


C4® LED technology for extreme brightness.

IPX4 Rated for water resistant operation.

1 meter impact resistance tested.

Serialized for positive identification.

LED Charge-continuity indicator on charger base.

Compact, snap-in charger mounts in any position.

WARRANTY:

Streamlight's Limited Lifetime Warranty.





APPROVALS:


CE Meets applicable European Community Directives.

(BC) CEC Compliant (Smart charger models only)

OPTIONAL
ACCESSORIES:

Safety wands, ring holder, holster, color filters, 2.2Ah Li-Ion battery, 5-unit bank charger, Smart charger, Steady charger or Smart Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		425 LUMENS	200 LUMENS	100 LUMENS
RUN TIME		3h	5h 30min	10h
DISTANCE		322m	219m	155m
INTENSITY		26,000cd	12,000cd	6,000cd

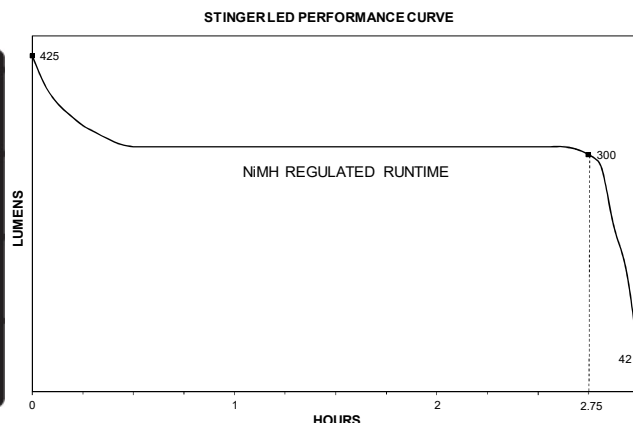

*With battery (included in purchase)

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 10/13/2006

Revised: 01/15/2018 Rev: 10

Assembled In The USA.

Document #201